

Local Gaussian process approximation for large computer experiments

Robert B. Gramacy
Booth School of Business
The University of Chicago
rbgramacy@chicagobooth.edu

Daniel W. Apley
Dept of Industrial Engineering
and Management Sciences
Northwestern University
apley@northwestern.edu

Abstract

We provide a new approach to approximate emulation of large computer experiments. By focusing expressly on desirable properties of the predictive equations, we derive a family of local sequential design schemes that dynamically define the support of a Gaussian process predictor based on a local subset of the data. We further derive expressions for fast sequential updating of all needed quantities as the local designs are built-up iteratively. Then we show how independent application of our local design strategy across the elements of a vast predictive grid facilitates a trivially parallel implementation. The end result is a global predictor able to take advantage of modern multicore architectures, while at the same time allowing for a nonstationary modeling feature as a bonus. We demonstrate our method on two examples utilizing designs sized in the thousands, and tens of thousands of data points. Comparisons are made to the method of compactly supported covariances.

Key words: sequential design, sequential updating, active learning, surrogate model, emulator, compactly supported covariance, local kriging neighborhoods

1 Introduction

The Gaussian process (GP) is a popular choice for emulating computer experiments (Santner et al., 2003). As priors for nonparametric regression, they are unparalleled; they are rarely beat in out-of-sample predictive tests, have appropriate coverage, and have an attractive ability to accomplish these feats while interpolating the response if so desired. That said, GPs do have disadvantages, and our aim is not to make an exhaustive or even representative list of them here. But perhaps the two most common criticisms are that (1) computation (for inference and prediction) scales poorly as data sets get large, and (2) that best results require an assumption of stationarity in the data-generating mechanism, which may not be appropriate. The second issue is usually coupled with the first. Emulators relaxing the stationarity assumption exist, but often require further computational expense. Examples include learning mappings from the original input space to one where stationarity reigns (e.g.

Schmidt and O’Hagan, 2003, and references therein), and process convolution approaches that allow the kernels to vary smoothly in parameterization as an unknown function of their spatial location (e.g., Paciorek and Schervish, 2006, and therein).

Several works in recent literature have made inroads in reducing the computational burden for stationary models, usually by making some kind of approximation. Examples include searching for a reduced set of “pseudo-inputs” (Snelson and Ghahramani, 2006), building up estimators iteratively in batches (e.g., Haaland and Qian, 2011), sequentially updating via particle methods tailored to design applications (Gramacy and Polson, 2011), fixed rank kriging (Cressie and Johannesson, 2008), and the use of compactly supported covariance (CSC) matrices and fast sparse linear algebra packages (Kaufman et al., 2012; Sang and Huang, 2012). Our contribution has aspects in common with all of these approaches and several others by association (e.g., Nychka et al., 2002; Quiñonero–Candela and Rasmussen, 2005; Furrer et al., 2006). It is reminiscent of *ad hoc* methods based on local kriging neighborhoods (e.g., Cressie, 1991, pp. 131–134). What we propose is more modern, scalable, more easily automated, which makes it ideal for multicore computing, and tailored to computer experiments. It draws in part on recent findings for approximate likelihoods in spatial data (e.g., Stein et al., 2004), and active learning techniques (e.g., Cohn, 1996).

We start by focusing on the prediction problem, locally, at an input x . In computer model emulation this is the primary problem of interest. We recognize, as many authors have before us, that data points far from x have vanishingly small influence on the predictive distribution (assuming the usual choices of covariance function). Thus, even though a large covariance matrix may have been calculated and inverted at great computational expense, not many of its rows/columns contribute substantively to the linear predictor. We focus on finding those data points (relative to x), and corresponding rows/cols, without considering the full matrices. In particular, we illustrate how a sensible objective criterion reduces to a key component of an active learning heuristic that has found recent application in the design of computer experiments literature (see, e.g., Gramacy and Lee, 2009).

Our localized sub-designs differ from a local nearest neighbor (NN) approach, and yield more accurate predictions. This echoes a result noted by Stein et al. (2004) who observe that NNs may not be ideal for learning correlation parameters. We extend that to obtaining predictions. Our predictions are robust, in a certain sense, to the covariance parameterization. First, they are applicable to any covariance so long as derivatives can be calculated. Second, we deliberately choose a very naïve one and nonetheless compare favorably out-of-sample to others having more thoughtful choices (e.g., Kaufman et al., 2012). The explanation is our local inferences imply a global nonstationary effect that compensates for overly smooth and simplistic local structure.

There are strong parallels between our suggested approach and CSC, although we are not applying any kind of tapering. We think of tapering as a continuous or smooth operation whereas our approach is more discrete. An advantage of our approximation is that accuracy can be explicitly linked to a computational budget—we know exactly how “sparse” our matrices are going to be before running the code, and we can monitor convergence to the (intractable) full-data counterparts. Importantly, no special sparse linear algebra routines

are need; we use only standard dense-matrix ones. Finally, since we focus on particular locations x , independent of others, our method is highly parallelizable. Parallel computation at a large set of x locations can proceed without communication between nodes, which means that trivial application of `OpenMP` pragmas yields nearly-linear speedups.

The remainder of the paper is outlined as follows. In Section 2 we review GP predictive modeling, inference and prediction. In Section 3 we derive a new sequential design criteria for greedily building local designs by considering future mean-squared prediction error (MSPE). We also derive expressions for the efficient updating of all required quantities in order to keep computational costs down, and argue that a simpler heuristic related to one from the *active learning* literature may prove to be even more efficient. Then in Section 4.2 we consider the global prediction problem, for many x , and discuss global inference for the correlation structure. Finally, all of the elements are brought together in Section 5 for empirical illustrations and comparisons to CSC. We conclude with a discussion in Section 6.

2 Gaussian process predictive modeling

A GP prior for functions $Y : \mathbb{R}^p \rightarrow \mathbb{R}$, where any finite collection of outputs are jointly Gaussian (Stein, 1999), is defined by its mean $\mu(x) = \mathbb{E}\{Y(x)\}$ and covariance $C(x, x') = \mathbb{E}\{[Y(x) - \mu(x)][Y(x') - \mu(x')]^\top\}$. A common simplifying assumption in the computer modeling literature is to take the mean to be zero, and this is the convention we will follow. Typically, one separates out the variance τ^2 in $C(x, x')$ and works with correlations $K(x, x') = \tau^{-2}C(x, x')$ based on Euclidean distance and a small number of unknown parameters. In this paper we focus on the isotropic Gaussian correlation $K_{\theta, \eta}(x, x') = \exp\{-\|x - x'\|^2/\theta\} + \eta\delta_{x, x'}$ where θ is called the *lengthscale* parameter, and η the *nugget*.

In keeping with trends in the computer experiments literature, we hold η at a pre-determined small value in order to obtain a near-interpolative surface which is appropriate when the computer model is deterministic. It is important to note that our main results do not heavily depend on of the choice of correlation function so long as derivatives (with respect to θ) are available. The isotropic, one-parameter (θ) family simplifies the exposition. However the derivations of our main results, provided in Appendix B, assume a separable family for generality.

Although technically a prior over functions, the regression perspective recommends a likelihood interpretation. Using data $D = (X, Y)$, where X is a $N \times p$ design matrix, the $N \times 1$ response vector Y has a multivariate normal (MVN) likelihood with mean zero and covariance $\Sigma(X) = \tau^2 K$, where K is an $N \times N$ matrix with $(ij)^{\text{th}}$ entry $K(x_i, x_j)$. Conditional on K , the MLE of τ^2 is available analytically. Profile likelihoods may then be used to infer other unknown parameters (e.g., θ).

Empirical Bayes (Berger et al., 2001) is more popular these days. One specifies a reference prior for the variance component, $\pi(\tau^2) \propto \tau^{-2}$, and integrates it out. An MVN likelihood

and prior which is algebraically equivalent to $\text{IG}(0, 0)$ makes integration analytic. We obtain

$$p(Y|K) = \frac{\Gamma[N/2]}{(2\pi)^{N/2}|K|^{1/2}} \times \left(\frac{\psi}{2}\right)^{-\frac{N}{2}}, \quad \text{where } \psi = Y^\top K^{-1}Y. \quad (1)$$

Numerical methods for finding parameters like θ generally work well when leveraging derivative information for the log likelihood, quoted here for convenience in later developments; derivations are included in Appendix B:

$$\ell'(\theta) \equiv \frac{\partial \log p(Y|K)}{\partial \theta} = -\frac{1}{2} \text{tr} \left\{ K^{-1} \dot{K} \right\} + \frac{N}{2} \times \frac{(Y^\top K^{-1} \dot{K} K^{-1} Y)}{\psi}, \quad (2)$$

$$\begin{aligned} \ell''(\theta) \equiv \frac{\partial^2 \log p(Y|K)}{\partial^2 \theta} &= -\frac{1}{2} \text{tr} \left\{ K^{-1} \left[\ddot{K} - \dot{K} K^{-1} \dot{K} \right] \right\} \\ &+ \frac{N}{2\psi} \times Y^\top K^{-1} \left[\ddot{K} - 2\dot{K} K^{-1} \dot{K} \right] K^{-1} Y + \frac{N}{2\psi^2} \times \left[Y^\top K^{-1} \dot{K} K^{-1} Y \right]^2, \end{aligned} \quad (3)$$

where $\dot{K}$ and $\ddot{K}$ are shorthand for $\frac{\partial K}{\partial \theta}$ and $\frac{\partial^2 K}{\partial^2 \theta}$ respectively. These can be used as the basis of a Newton–Raphson scheme, but complications arise in the not uncommon situation where the likelihood is multimodal (e.g., Rasmussen and Williams, 2006, Chapter 5).

The marginalized predictive equations for GP regression are available in closed form. Specifically, the distribution of the response $Y(x)$ conditioned on data D and covariance $K(\cdot, \cdot)$, i.e., $p(y(x)|D, K)$, is Student- t with degrees of freedom N ,

$$\text{mean} \quad \mu(x|D, K) = k^\top(x) K^{-1} Y, \quad (4)$$

$$\text{and scale} \quad \sigma^2(x|D, K) = \frac{\psi [K(x, x) - k^\top(x) K^{-1} k(x)]}{N}, \quad (5)$$

where $k^\top(x)$ is the N -vector whose i^{th} component is $K(x, x_i)$. Using properties of the Student- t , the variance of $Y(x)$ is $V(x) \equiv \text{Var}[Y(x)|D] = \sigma^2(x|D, K) \times N/(N-2)$.

3 Localized approximate emulation

If obtaining fast approximate prediction at x is the goal, then a first stab may be to use a small sub-design of X locations closest to x . I.e., choose the *n-nearest neighbor (NN) sub-design* $X_n(x) \subseteq X$ and apply the predictive equations (4–5) with $D_n(x) = (X_n, Y_n)$ where n is chosen as large as computational constraints will allow. This is a sensible approach. It is clearly an approximation: as $n \rightarrow N$, predictions of $Y(x)|D_n$ and $Y(x)|D$ converge trivially. Moreover, since the predictive equations are valid for any design, interpreting the accuracy of the approximation involves the same quantities as those obtained from an analysis based the on full design. Clearly, when $n \ll N$, the variance $V(x)|D_n$ can be much larger than $V(x)|D$. However, if N is so big as to preclude obtaining any predictor at all, within reasonable computational constraints, obtaining a predictor with marginally inflated uncertainty is better than nothing.

Though simple, one naturally wonders if it is optimal given computational constraints (n). It is not: Vecchia (1988) observed that the best sub-design for prediction depends on the correlation parameters (θ) and is usually not the NN design. Stein et al. (2004) go further by showing that NN is uniformly suboptimal under certain regularity conditions. Still, finding the best design for $n > 1$ is computationally difficult. It would involve a high-dimensional non-convex optimization—a computational nightmare in its own right. Joint inference with θ is more difficult still, compounding the issue. Although the simple yet sub-optimal NN idea seems attractive again, the main goal of this paper is to demonstrate that it is possible to do better without much extra effort.

The general framework, which is akin to forward stepwise variable selection in regression, is as follows. For a particular predictive location x , we search for a sub-design $X_n(x)$, with accompanying responses $Y_n(x)$, together comprising data $D_n(x)$, by making n greedy decisions $D_{j+1}(x) = D_j(x) \cup (x_{j+1}, y(x_{j+1}))$ for $j = 1, \dots, n$. Each choice of x_{j+1} depends on the previous choices saved in $D_j(x)$ by searching over a decision criterion. Evaluating the criterion, and updating the quantities required for the next iteration, must not exceed $O(j^2)$ so that the total scheme remains $O(n^3)$. We start with a very small $D_0(x)$ comprised of NNs, which is easy to motivate in light of results shown in Section 3.4.

3.1 Greedy search to minimize mean-squared predictive error

Given x and $D_j(x)$, we search for x_{j+1} by considering its impact on the predictive variance of $Y(x)$, taking into account uncertainty in θ , through an empirical Bayes mean-square prediction error (MSPE) criterion: $J(x_{j+1}, x) = \mathbb{E}\{[Y(x) - \mu_{j+1}(x; \hat{\theta}_{j+1})]^2 | D_j(x)\}$, which should be minimized. The predictive mean $\mu_{j+1}(x; \hat{\theta}_{j+1})$ follows (4), although we embellish notation here to explicitly indicate dependence on x_{j+1} and the future/unknown y_{j+1} . This mean represents the hypothetical prediction of $Y(x)$ arising after choosing x_{j+1} , observing y_{j+1} , and calculating the MLE $\hat{\theta}_{j+1}$ based on the resulting $D_{j+1}(x)$. Where convenient we drop the x argument in the local design, $D_j \equiv D_j(x)$. Also note that $\hat{\theta}_j \equiv \hat{\theta}_j(x)$ since it depends on $D_j(x)$.

In Appendix B we derive the approximation

$$J(x_{j+1}, x) \approx V_j(x|x_{j+1}; \hat{\theta}_j) + \left(\frac{\partial \mu_j(x; \theta)}{\partial \theta} \Big|_{\theta=\hat{\theta}_j} \right)^2 / \mathcal{G}_{j+1}(\hat{\theta}_j). \quad (6)$$

The terms in (6) are explained below in turn.

- $V_j(x|x_{j+1}; \theta)$ is an estimate of the new variance that will result after adding x_{j+1} into D_j , treating θ as known.

$$V_j(x|x_{j+1}; \theta) = \frac{(j+1)\psi_j}{j(j-1)} v_{j+1}(x; \theta),$$

where $v_{j+1}(x; \theta) = [K_{j+1}(x, x) - k_{j+1}^\top(x) K_{j+1}^{-1} k_{j+1}(x)]$ (7)

is capturing x_{j+1} 's contribution to the reduction in variance by placing its correlations to X_j in the $j + 1^{\text{st}}$ row/col of K_{j+1} . The correlation between x and $X_{j+1}(x) \equiv (X_j(x), x_{j+1})$ comes in through the $j + 1^{\text{st}}$ entry of k_{j+1} , the rest being k_j . The other part of the expression, involving an estimate of τ^2 via ψ_j/j from D_j , deliberately avoids using y_{j+1} but it recognizes its effect as an additional design point in the denominator.

- $\frac{\partial \mu_j(x; \theta)}{\partial \theta}$ is the partial derivative of the predictive mean (4) at x , given D_j , with respect to the lengthscale parameter. In the appendix this is derived as

$$\frac{\partial \mu_j(x; \theta)}{\partial \theta} = K_j^{-1} [\dot{k}_j(x) - \dot{K}_j K_j^{-1} k_j(x)]^\top Y_j, \quad (8)$$

where $\dot{k}_j(x)$ is the j -length column vector of derivatives of the correlation function $K(x, x_k)$, $k = 1, \dots, j$, with respect to θ .

- $\mathcal{G}_{j+1}(\theta)$ is the expected Fisher information¹ comprised of the information from D_j plus the expected component from the future y_{j+1} at x_{j+1} :

$$\begin{aligned} \mathcal{G}_{j+1}(\theta) &= F_j(\theta) + \mathbb{E} \left\{ -\frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial \theta^2} \middle| D_j; \theta \right\} \\ &\approx F_j(\theta) + \frac{1}{2V_j(x_{j+1}; \theta)^2} \times \left(\frac{\partial V_j(x_{j+1}; \theta)}{\partial \theta} \right)^2 + \frac{1}{V_j(x_{j+1}; \theta)} \left(\frac{\partial \mu_j(x_{j+1}; \theta)}{\partial \theta} \right)^2, \end{aligned} \quad (9)$$

where $F_j(\theta) = -\ell''(Y_j; \theta)$ from (3), $V_j(x_{j+1}; \theta) \equiv V(x_{j+1} | D_j; \theta)$ following (5), and

$$\begin{aligned} \frac{\partial V_j(x; \theta)}{\partial \theta} &= \frac{Y_j^\top K_j^{-1} \dot{K}_j Y_j}{j - 2} \left(K(x, x) - k_j^\top(x) \tilde{k}_j(x) \right) \\ &\quad - \psi_j \left[\dot{k}_j(x) \tilde{k}_j(x) + \tilde{k}_j(x)^\top (\dot{k}_j(x) - \dot{K}_j k_j(x)) \right], \end{aligned}$$

where $\dot{K}_j = \dot{K}_j K_j^{-1}$ and $\tilde{k}_j(x) = K_j^{-1} k_j(x)$.

The approximation in (6) is three-fold: (a) the partial derivative of μ_{j+1} is approximated by that of μ_j ; (b) the Student- t predictive equations are approximated by moment-matched Gaussian ones (9); and (c) the future $\hat{\theta}_{j+1}$ is replaced by the current estimate $\hat{\theta}_j$ based on the data D_j obtained so far. All are required since averaging over future *expected* y_{j+1} is analytically intractable. Even though a y_{j+1} is technically available in our context, we deliberately do *not* condition on this value, which would result in the undesirable avoidance of selecting an x_{j+1} whose y_{j+1} is in disagreement with the previously selected sub-design. [See Appendix B for further discussion.]

Observe that when the Fisher information is large, the MSPE (6) is dominated by the reduced variance for x_{j+1} , the first term. We return to this special case in Section 3.3. For

¹The information is a scalar for scalar θ in this development, however the derivations in the appendix apply more generally.

smaller j the extra term gives preference to choosing an x_{j+1} that is expected to improve estimates of θ nearby to x . Considering that a sensible non-local design strategy is to maximize (the determinant of) the Fisher information, the MSPE is thus making a local adjustment by (a) weighting the Fisher information by the rate of change of the predictive mean near x and (b) balancing that with the aim of reducing local predictive variance. The appropriate balance is automatically dictated by the definition of $J(x_{j+1}, x)$, which considers the effect of uncertainty in θ on the predictive uncertainty in $Y(x)$. Aspect (a) is suggestive of potential benefit in estimating a localized, i.e., nonstationary, spatial field.

3.2 Fast updates

MSPE is deployable because everything it requires can be obtained by fast updating schemes from one iteration to the next: $j \rightarrow j + 1$. Below, we outline updates that require time in $O(j^2)$ so that n applications are in $O(n^3)$. This is possible since K_{j+1}^{-1} can be obtained efficiently from K_j^{-1} , both conditional on the same parameter θ , via the partition inverse equations (Barnett, 1979, Appendix A). We use them in several applications. For example,

$$\begin{aligned} v_j(x; \theta) - v_{j+1}(x; \theta) \\ = k_j^\top(x) G_j(x_{j+1}) m_j^{-1}(x_{j+1}) k_j(x) + 2k_j^\top(x) g_j(x') K(x_{j+1}, x) + K(x_{j+1}, x)^2 m_j(x_{j+1}), \end{aligned} \quad (10)$$

where $G_j(x') \equiv g_j(x') g_j^\top(x')$,

$$g_j(x') = -m_j(x') K^{-1} k_j(x') \quad \text{and} \quad m_j^{-1}(x') = K_j(x', x') - k_j^\top(x') K_j^{-1} k_j(x'). \quad (11)$$

Each product above requires most an $O(j^2)$ time. Adding a row and column $k_j(x_{j+1})$ to K_j which, together with $K(x_{j+1}, x_{j+1}) = 1 + \eta$, yields K_{j+1} in $O(j)$ extra time and space. In addition to aiding in computation, Eq. (10) helps clarify how variance is reduced at x as a function of x_{j+1} . The $K(x_{j+1}, x)^2$ term is suggestive of a large reduction the closer x is to x_{j+1} , however $k_j(x)$ suggests that distances from x to $X_j(x)$ are also a factor.

The log marginal likelihood requires $\log |K_j|$ which, by similar considerations, may be updated in $O(j)$ time as follows:

$$\log |K_{j+1}| = \log |K_j| + K(x_{j+1}, x_{j+1}) + g_j^\top(x_{j+1}) k_j(x_{j+1}) / m_j(x_{j+1}).$$

Fast updates are also available for key aspects of the predictive equations (4–5):

$$\begin{aligned} K_{j+1}^{-1} Y_{j+1} &= \begin{pmatrix} K_j^{-1} Y_j + g_j(x_{j+1}) (h_j(x_{j+1}) / m_j(x_{j+1}) + y_{j+1} m_j(x_{j+1})) \\ h_j(x_{j+1}) + y_{j+1} m_j(x_{j+1}) \end{pmatrix} \\ \text{and } \psi_{j+1} &= \psi_j + h_j(x_{j+1})^2 / m_j(x_{j+1}) + 2y_{j+1} h_j(x_{j+1}) + y_{j+1}^2 m_j(x_{j+1}), \end{aligned}$$

where $h_j(x_{j+1}) = Y_j^\top g_j(x_{j+1})$. Both updates take time in $O(j)$.

For fast updates of the observed information $F_{j+1}(\theta)$, write the log likelihood as a sum of components from D_j and from (x_{j+1}, y_{j+1}) , with the latter denoted by $\ell_j(y_{j+1}; \theta)$. This

suggests the simple recursion $F_{j+1}(\theta) = F_j(\theta) + \frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial^2 \theta}$. In Appendix B we show that

$$\frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial^2 \theta} = -\frac{\ddot{V}_j}{2V_j} + \frac{\dot{V}_j^2}{2V_j^2} - \frac{\dot{\mu}_j^2}{V_j} + (y_{j+1} - \mu_j) \left(\frac{\ddot{\mu}_j}{V_j} - 2\frac{\dot{\mu}_j \dot{V}_j}{V_j^2} \right) + (y_{j+1} - \mu_j)^2 \left(\frac{\ddot{V}_j}{2V_j^2} - \frac{\dot{V}_j^2}{V_j^3} \right).$$

For compactness we are suppressing arguments to the mean and variance functions, and shorthanding their derivatives. E.g., $V_j \equiv V_j(x_{j+1}; \theta)$ and $\ddot{\mu}_j \equiv \frac{\partial^2 \mu_j(x_{j+1}; \theta)}{\partial^2 \theta}$. Expressions for second derivatives of predictive quantities may be found in the appendix. Observe that the expectation (given D_j) of the above quantity augments $F_j(\theta)$ to complete $\mathcal{G}_{j+1}(\theta)$ in (9).

Updates of all other quantities required for the calculations in Section 3.1 follow trivially. Since they require fixed θ , our greedy scheme is only efficient if MLEs are *not* recalculated after each sequential design decision, suggesting further approximation is warranted to obtain a thrifty MSPE-based local design. We find that working with a reasonable fixed value of θ throughout the iterations works well. At the end of the n local design and update steps we can find the MLE $\hat{\theta}(x)$ by Newton-like methods with analytic derivatives (2–3), which would incur $O(n^3)$ cost once. More details on local inference are deferred to Section 4.2.

3.3 A special case

Recall that when the Fisher information is large, the MSPE (6) reduces to $V_j(x|x_{j+1}; \theta)$, which is the new variance at x when x_{j+1} is added into the design [Section 3.1]. A similar statistic has been used in the sequential design of computer experiments before, but in a different context: choosing design locations at which to run new computer simulations (e.g., Seo et al., 2000; Gramacy and Lee, 2009). Rather than focusing on a particular predictive location, x , consider averaging reductions in variance over the whole input space $\mathcal{X}$: $\Delta V_j(x_{j+1}; \theta) = \int_{\mathcal{X}} V_j(x; \theta) - V_j(x|x_{j+1}; \theta) dx$. Part of the integrand does not depend on x_{j+1} , and so can be ignored. The other part is proportional to $v_{j+1}(x; \theta)$ in (10). In the special case where $K(\cdot, \cdot)$ yields the identity (Anagnostopoulos and Gramacy, 2012), or when $\mathcal{X}$ is a finite and discrete set, the integral is also analytic. Otherwise numerical methods are needed, which may add significant computational burden.

Choosing x_{j+1} to maximize $\Delta V_j(x_{j+1}; \theta)$ is a sensible heuristic since it augments the design with an input-output pair that has the most potential to reduce variance globally. In repeated application, $j = 1, \dots, N$, the resulting designs have been shown to approximate maximum information designs (Cohn, 1996). To credit its originator, subsequent authors have referred to this technique as *active learning Cohn* (ALC). However, most note that the extra computational burden required for numerical integration is not justified relative to alternative design schemes.

A local design criteria based on the integrand alone—the simplest implementation of which involves maximizing (10)—may therefore be a sensible alternative to MSPE, not just further approximation. On the one hand, it leverages an information theoretic criteria. On the other it shortcuts a great deal of computational effort and memory involved in MSPE since derivatives are not needed. In what follows we overload the terminology a bit and refer to local design based on maximizing (10) as ALC. However, it is important to note that its

application in this context is novel. ALC in its original form has never been used to select a local sub-design and, since no integration is needed (numerical or otherwise) the computation is straightforward. In Appendix C we show that this heuristic can be derived by studying partial correlations akin to those used to derive sequential least squares estimators.

3.4 An illustration

Consider a surface first studied by Gramacy and Lee (2011b),

$$f(x_1, x_2) = -w(x_1)w(x_2), \quad \text{where} \\ w(x) = \exp(-(x-1)^2) + \exp(-0.8(x+1)^2) - 0.05 \sin(8(x+0.1))$$

generating a data set of x - y pairs on dense 201×201 ($= 40401$ point) regular grid in $[-2, 2]$. Figure 1 shows local designs for two input locations, x , under MSPE and ALC criteria.

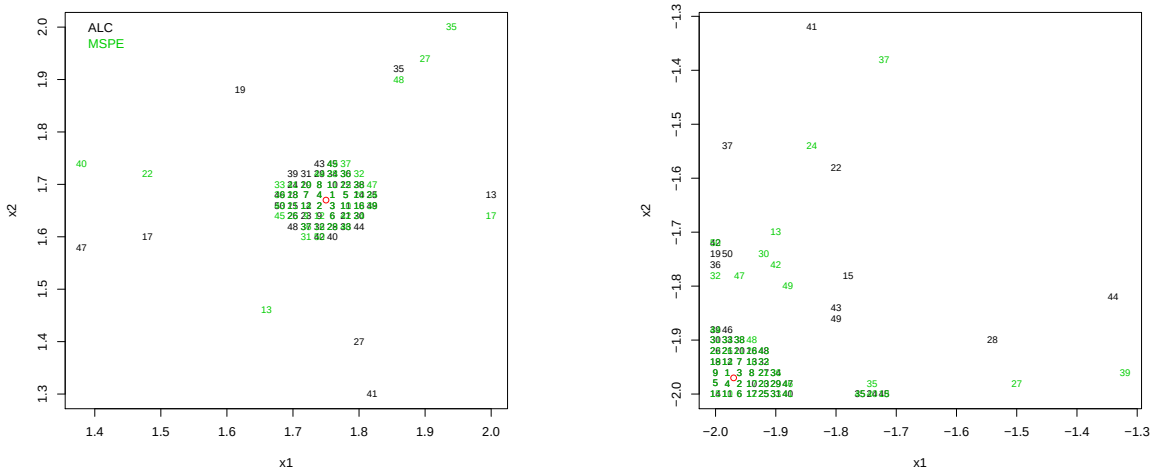


Figure 1: A comparison between ALC and MSPE heuristics at two predictive locations. The numbers plotted indicate the order in which the design sights were chosen.

Both share the same initial design D_0 comprising the closest six NNs to x . Although the two heuristics agree on some sights chosen, observe that they are not selected in the same order after iteration nine. The patterns diverge most for further out local design choices but the qualitative flavor of the pattern of designs is similar. In both cases, the bounding box $[-2, 2]^2$ impacts the symmetry of the local design.

The full 46 local design iterations take less than a tenth of a second on a modern iMac, although in repeated trials (to remove OS noise) we found that MSPE takes 2-3 times longer. Inverting a $40K \times 40K$ matrix cannot, to our knowledge, be done on a modern desktop primarily due to memory swapping issues. For a point of reference, inverting a 4000×4000 matrix took us about seven seconds using a multithreaded BLAS/Lapack. Memory issues aside we deduce that the alternative full-GP result would have taken days.

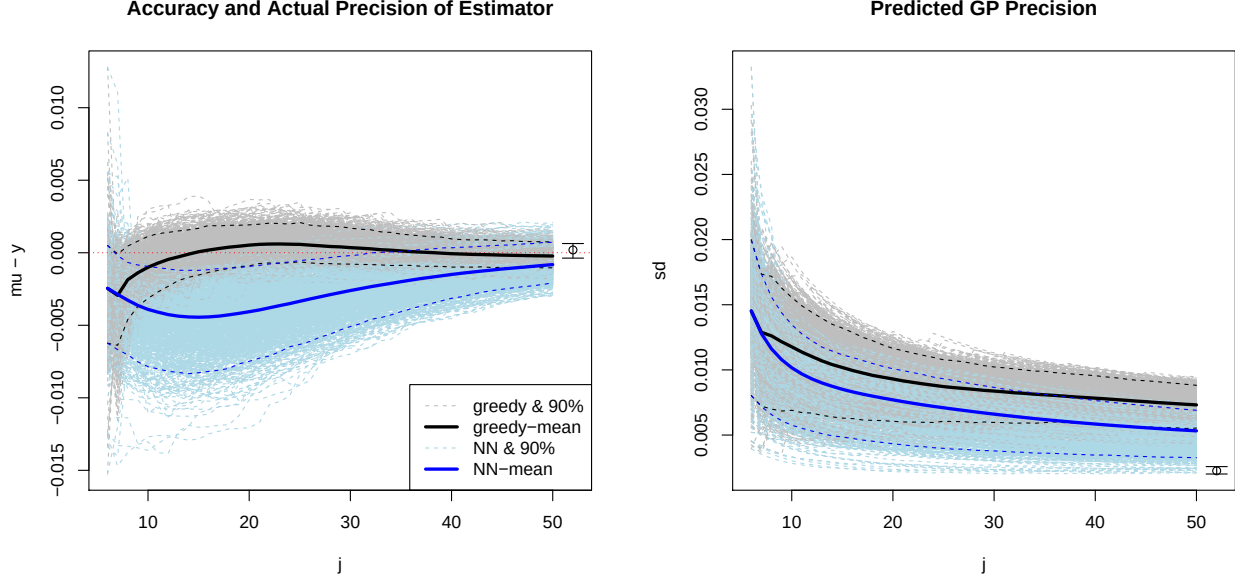


Figure 2: Comparing the NN predictor to the greedy selection approach in 1000 repeated repetitions an LHS of size 10001: 10K train/1 test. Both methods are initialized with an NN design $|D_0| = 6$. The *left* pane shows the actual bias and precision and the *right* shows the predicted precision (via the square-root of the GP predictive variances). Each repetition is shown in light shades; the darker dashed lines are 90% quantiles, and the dark solid line is the average. The open-circles with whiskers at $j = 52$ are the the 90% quantile and average results from a size 1000 NN design.

Figure 2 illustrates the accuracy of the approximate predictive distribution thus obtained, with comparison to the NN alternative. These results summarize the output of a Monte Carlo experiment repeated 1000 times, whose setup is similar to that above with the following exception. In each repetition we generated a Latin Hypercube sample (LHS; McKay et al., 1979) of size 10001, and treated the first 10K as training (X, Y) and the last one as our testing (x, y) . We then obtained the predictive equations under NN and greedy/MSPE² local designs (to x) of size 50, where both share a starting NN design D_0 of size six. Each lightly-shaded line in the plot represents one Monte Carlo iteration. The dark-dashed lines outline point-wise 90% intervals, and the dark-solid lines show the point-wise averages. The open circles and whiskers at 52 on the j -axis provide an approximate benchmark for the best possible results. It is based on a NN local design of size 1000.³

The *left* pane shows the bias, defined as the predictive mean $\mu_n(x)$ minus the true y -value. Notice how, relative to the greedy/MSPE method, the NN approach is slow to converge to the true value and is consistently biased low after the initial design. Both start biased-low, which we attribute to 0-mean reversion typical (for GPs) in areas of the input space sparsely

²The results for ALC are very similar.

³This is the largest design we could manage with reasonable computing effort (when repeated 1000 times).

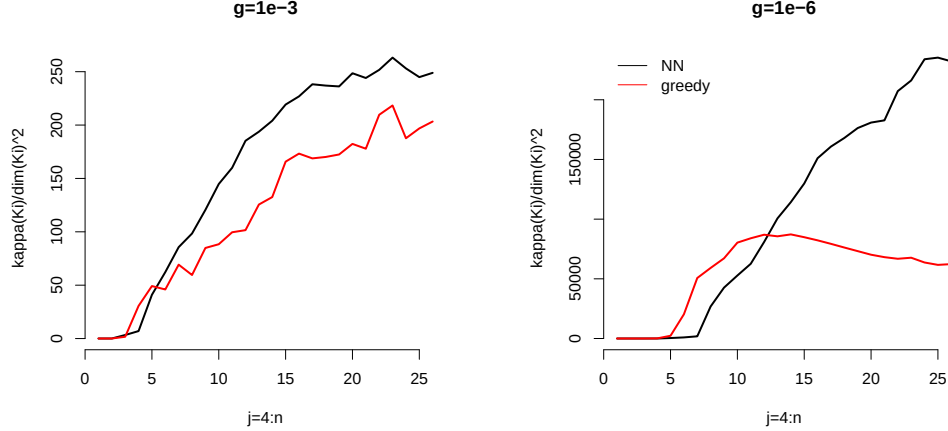


Figure 3: Condition numbers versus design size for NN and greedy methods for two different values of the nugget, η .

covered by the design. The *right* pane shows the predictive standard deviation over design iterations. Notice that the NN standard deviations are consistently lower than those from the greedy/MSPE method. So the NN method both biased-low *and* more confident than its comparator. Finally, observe that both methods obtain a predictive mean close to the truth at $|D_n| = 50$, with lower variability for the greedy/MSPE method. Moreover, both adequately acknowledge uncertainty inherent in the approximation obtained using a much smaller local design compared to one obtained with orders of magnitude larger designs.

A knock-on effect of the spacing of the sub-design points found by the greedy method is that the condition numbers (ratio of the largest to smallest eigenvalue)⁴ of the resulting covariance matrices, K_j , are lower relative to those of the NN method as j becomes large. Figure 3 provides an illustration. The *left* plot corresponds to exactly the setup giving rise to the *right* panel Figure 1, using ALC; whereas the *right* plot uses a smaller nugget value, η . Lower condition numbers indicate greater numerical stability and thus more reliable matrix decompositions. This is relevant for GP surrogate modeling since it means that smaller nuggets, and thus truer interpolations, can be achieved with the greedy method if so desired. Although some recent papers have argued that the quest for truer interpolation in surrogate modeling may not be efficient from a statistical perspective (Gramacy and Lee, 2011a; Peng and Wu, 2012), seeking out the smallest possible nugget while retaining numerical stability remains an aspiration in the literature (Ranjan et al., 2011).

4 Global emulation on a dense design

The simplest way to extend the analysis to cover a dense design of predictive locations $x \in \mathcal{X}$ is to serialize: loop over each x collecting approximate predictive equations, each

⁴We used the `kappa` function in R with default arguments.

in $O(n^3)$ time. For $T = |\mathcal{X}|$ the total computational time is in $O(Tn^3)$. Obtaining each of the full GP sets of predictive equations, by contrast, would require computational time in $O(TN^2 + N^3)$, where the latter N^3 is attributable to obtaining K^{-1} .⁵ One of the nice features of standard GP emulation is that once K^{-1} has been obtained the computations are fast $O(N^2)$ operations for each location x . However, as long as $n \ll N$ our approximate method is even faster despite having to rebuild and re-decompose $K_j(x)$ ’s for each x .

4.1 Parallelization

The approximation at x is built up sequentially, but completely independently of other predictive locations, even ones nearby. Since a high degree of local spatial correlation is a key modeling assumption this may seem like an inefficient use of computational resources, and indeed it would be in serial computation for each x . However, this independence allows trivial parallelization. Predicting at a dense design of 10K locations on an 8-core iMac, otherwise using the same 40K design setup as in Section 3.4 but with a fixed $\theta = 0.1$ for all x , took about 30 seconds to execute and required only token programmer effort: we augmented a single C “for” loop over $x \in \mathcal{X}$ with an OpenMP “pragma”:

```
#ifdef _OPENMP
    #pragma omp parallel for private(i)
#endif
    for(i=0; i<npred; i++) { ...
```

That’s actual code from our implementation—and the full extent of our modifications for parallelization—where `npred` = $|\mathcal{X}|$. This led to a nearly linear speedup: runtimes for P processors scale roughly as $1/P$.

Illustration continued

Figure 4 offers visualizations of the behavior of our greedy, local, approximations applied globally in the input space. The *left* column contains surfaces for both input dimensions, whereas the *right* one shows a 1d slice for $x_2 = 1$. The mean surfaces (*top* row) exhibit essentially no visual discrepancy to the truth. There are, however, small discrepancies (*middle* row) and the level of accuracy is not uniform across the input space. Pockets of higher (though still very small) inaccuracy are visible. Finally, despite the uniform gridded design, the predictive standard deviation (*bottom* row) is very non-uniform throughout the input space, appearing to smoothly vary albeit across a narrow range of values. This subtly non-stationary behavior is due to the localized estimation of τ^2 via $\psi(x)$. It is not due to θ since that was fixed globally. Closer inspection reveals that areas of lower predictive variability (*bottom* row) correspond to greater inaccuracy (*middle*). Both results suggest that the localized greedy approximation is struggling to cope with the assumed stationary covariance. The predictor(s) may benefit from a more deliberate localized approach to the estimation of spatial correlation.

⁵If only the predictive mean is needed, and not the variance, then the time reduces to $O(TN + N^3)$.

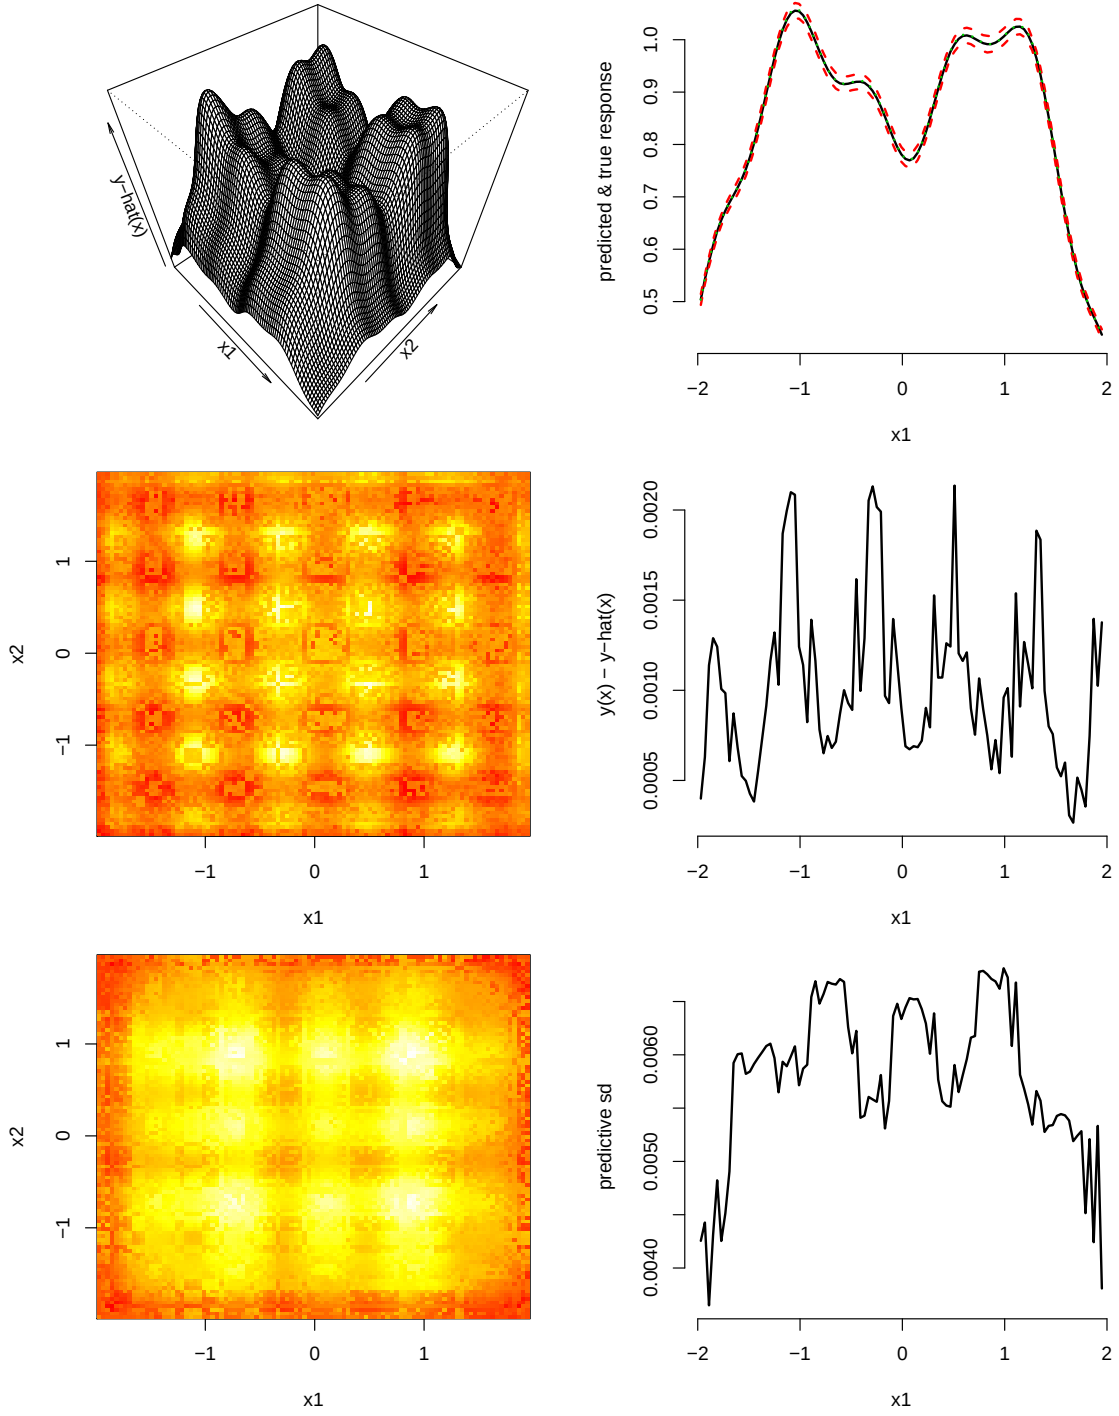


Figure 4: The *left* column shows 2d visualizations of the posterior mean surface $\mu(x|D_n)$, difference between the mean and the truth $\mu(x|D_n) - y(x)$ and the predictive standard deviation $\sqrt{V(x|D_n)}$. The *right* column shows the same for the slice $x_2 = 0.5$.

4.2 Localized parameter inference and stagewise design

Wishing to leverage fast sequential updating, retain independence in calculations for each predictive location x so they can be parallelized, and allow for local inference of the correlation structure for nonstationary modeling, we propose the following iterative scheme.

1. Choose a sensible starting global lengthscale parameter $\theta_x = \theta_0$ for all x .
2. Calculate local designs $D_n(x, \theta_x)$ based on sequential application of the MSPE design heuristic (6), independently for each x .
3. Also independently, calculate the MLE lengthscale $\hat{\theta}_n(x)|D_n(x, \theta_x)$ thereby obtaining a globally nonstationary predictive surface.
4. Set $\theta_x = \hat{\theta}_n(x)$ possibly after smoothing spatially over all x locations.
5. Repeat steps 2–4 as desired.
6. Obtain predictive equations at each x , independently, based on $D_n(x)$ and possibly smoothed θ_x .

Usually only one repetition of steps 2–4 is required for joint convergence of local designs $D_n(x)$ and parameter estimates $\theta_n(x)$, for all locations x . The initial θ_0 is key, however, since pathological values can slow convergence. We recommend choosing θ_0 midway between the average minimum squared distance and average mean squared distance between all pairs of design points.

MLE calculations in Step 3 proceed via Newton-like methods as described in Section 3.2. We take the previous value θ_x for initialization which may be θ_0 in the first stage or a possibly smoothed $\hat{\theta}_n(x)$ in later stages. Convergence is very fast in the latter case (1–4 iterations) as we illustrate below. The former can require about twice as many iterations depending on θ_0 , however this can be reduced significantly if a nearby $\hat{\theta}_n(x')$ can be used for initialization instead. As a share of the computational cost of the entire local design scheme, the burden of finding local MLEs is dwarfed by the MSPE calculations when the global design (i.e., the candidate locations for the local designs) is large, $N \gg n$. So reducing the number of Newton steps may not be a primary concern in practice.

The smoothing suggestion in Step 4 stems from both pragmatic and modeling considerations. GP likelihood surfaces can be multimodal so the Newton method is not guaranteed to find a global mode. Smoothing can offer some protection against rapid mode-switching in local estimators. On the modeling end, it is sensible to posit *a priori* that the correlation parameters be constrained somewhat to vary slowly across the input space. As we illustrate below, a simple neighborhood scheme leads to nice (smooth) visualizations of spatially varying lengthscale parameters. We note that this step is not absolutely necessary to obtain good prediction results, though it may aid in convergence of the two-stage scheme.

Illustration continued

Figure 3 shows the estimated log local lengthscale parameters on our illustrative example from Section 3 using ALC; the MSPE results are similar but require 50% more computational effort. The first pane shows a snapshot after the first stage; the second after the second stage. These have been smoothed using `loess` in R with a span of 0.01, giving non-negligible weight to only the twelve or so NNs in our particular predictive grid of x values. Notice the increase

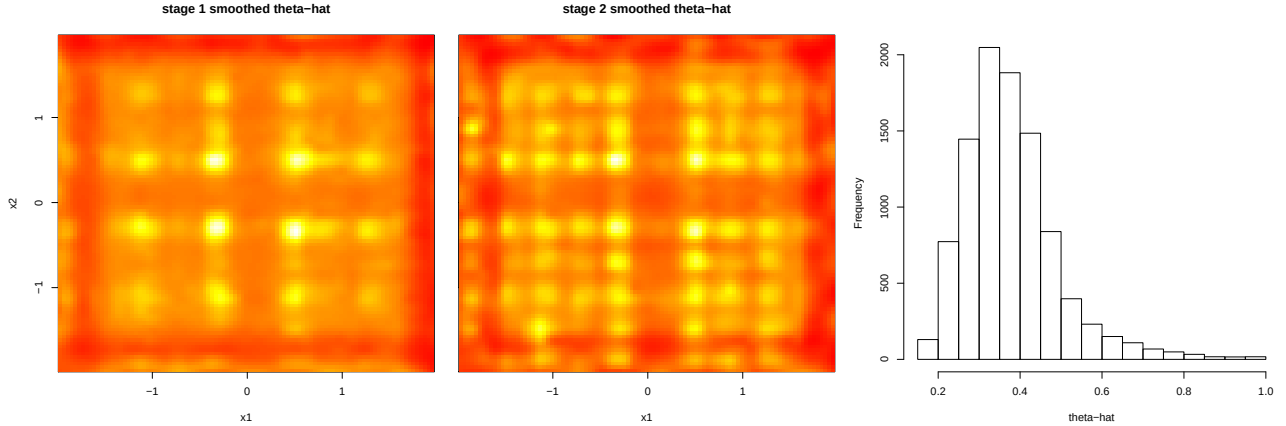


Figure 5: Smoothed $\log \hat{\theta}_n(x)$ values after the first and second stages (reds are lower values), followed by a histogram of the of those values from the second stage.

in fidelity from one stage to the next. The variation the correlation behavior over the input space is unmistakable after either stage. Observe the similarity to the predictive error and variance results from Figure 4, with larger lengthscales corresponding to areas poorer emulation under the model with a fixed, global, lengthscale. The final pane in Figure 5 shows a histogram of the locally estimated lengthscale parameters obtained after the second stage. The Newton steps from the first stage required about 6.5 iterations on average, with 90% between 6 and 8 whereas the second stage took only 4.2 (3 to 6) when primed with the previous stage values.

5 Empirical demonstration and comparison

For more compelling illustration and comparison, consider the borehole function (Worley, 1987) which is a common benchmark for computer experiments (e.g. Morris et al., 1993). The response y is given by

$$y = \frac{2\pi T_u [H_u - H_l]}{\log\left(\frac{r}{r_w}\right) \left[1 + \frac{2LT_u}{\log(r/r_w)r_w^2 K_w} + \frac{T_u}{T_l}\right]}. \quad (12)$$

The eight inputs are constrained to lie in a rectangular domain:

$$\begin{array}{llll} r_w \in [0.05, 0.15] & r \in [100, 5000] & T_u \in [63070, 115600] & T_l \in [63.1, 116] \\ H_u \in [990, 1110] & H_l \in [700, 820] & L \in [1120, 1680] & K_w \in [9855, 12045]. \end{array}$$

Part of our reason for choosing this data is that it was used as an illustrative example for the CSC method described by Kaufman et al. (2012), which may be the most widely adopted modern approach to fast approximate emulation for computer experiments. The authors provide a script illustrating their R package `sparseEM` on this data.

<http://www.stat.berkeley.edu/~cgk/rcode/assets/SparseEmExample.R>

In the first part of our comparison below we follow that script verbatim, except augmenting their 99% sparse estimator with a 99.9% one for faster results.

They generate a LHS of size 4500 and use the first 4000 for training and the rest for testing. Nash–Sutcliffe efficiency is used to evaluate the predictive accuracy of their method.

$$\text{NSE} = 1 - \frac{\sum_{x \in X_{\text{pred}}} (\hat{Y}(x) - Y(x))^2}{\sum_{x \in X_{\text{pred}}} (Y(x) - \bar{Y})^2} \quad (13)$$

Here, $\hat{Y}(x)$ represents the predicted value of $Y(x)$, which for all models under comparison will be the posterior predictive mean; $\bar{Y}$ is the average value of $Y(x)$ over the design space. The second term in (13) is estimated predictive mean-squared error (i.e., that which we approximately optimize over when calculating a local MSPE design) over the unstandardized variance of $Y(x)$. Therefore NSE can be interpreted as an out-of-sample analog of R^2 .

We compare several variations of our method, comprised of local designs via NN, and greedy ones following MPSE and ALC criterion. All methods are initialized with $\theta_0 = 0.7$ which is approximately the midpoint between the average minimum squared distance and average squared distance between all pairs of design points. We also consider a second iteration of MSPE and ALC design initialized with MLEs $\hat{\theta}(x)$ (without smoothing) from the first stage. We consider NN with $\hat{\theta}(x)$ too, *ex post*, but note that second stage local NN designs would be identical to those from the first stage since NN do not depend on θ . Other particulars are exactly the same as in our earlier illustrative example: the local methods start with $|D_0(x)| = 6$ NNs, and grow iteratively until $|D_n(x)| = 50$. Finally, we repeat each experiment thirty times, in a Monte Carlo fashion, with new random LHS training and testing sets.

Table 1 summarizes the results of two comparisons. One (*left*) for the original borehole comparison, and another (*right*) with double-sized training and testing sets. The timings, obtained on the same 8-core iMac throughout, comprise of the sum of fitting and prediction stages. `OpenMP` pragmas were used to parallelize our local design methods. Although CSC is not explicitly multi-threaded, the sparse linear algebra libraries it uses (from the `spam` package) are threaded, and therefore do utilize multiple cores.⁶ We can see clearly from

⁶We observed between 1 and 5 threads being used by `sparseEM`, however only about 125% of the total 800% of available computing resources were being used.

$N = 4000, N_{\text{pred}} = 500$				$N = 8000, N_{\text{pred}} = 1000$			
method	secs	NSE	p -val	method	secs	NSE	p -val
mspe2	+58.34	0.99957	0.41321	alc2	+75.02	0.99965	0.01324
alc2	+37.58	0.99957	0.00000	mspe2	+119.66	0.99964	0.00000
mspe	58.49	0.99913	0.02730	mspe	117.56	0.99929	0.11301
alc	37.59	0.99911	0.03470	alc	75.26	0.99928	0.00008
csc99	6961.17	0.99906	0.00000	csc99	27161.04	0.99920	0.00000
csc999	364.71	0.99887	0.00000	csc999	2805.15	0.99890	0.00000
nn	0.91	0.99581	0.00486	mspe.nomle	115.77	0.99705	0.00000
mspe.nomle	58.02	0.99551	0.13011	alc.nomle	73.40	0.99692	0.00000
alc.nomle	36.85	0.99546	0.00000	nn	2.15	0.99629	0.00000
nn.nomle	0.20	0.97337		nn.nomle	0.70	0.98007	

Table 1: Average timings (in seconds) and accuracy (in NSE) values from two thirty-fold Monte Carlo experiments on the borehole data. The *left* table echoes the experiments for CSC; the *right* table is for a double-sized experiment. The third column in both tables contains p -values from one-sided t -tests of adjacent performers (better v. next-best). The “+” next to the second-stage timings indicate that number reported is just for that stage. The total time is the sum of the first and second stages.

the table(s) that even without parallelization (8x slower) our local methods are orders of magnitude faster than the CSC ones.

Differences in the raw accuracy numbers, via average NSE, are less stark at first glance. The rows in the table are ordered from most to least accurate. The third column gives a p -value for a one-sided paired t -test under the alternative that that row’s NSEs came from a different population than those with the next-lowest averages (next row down). For example, at the 5% level, the best method (“mspe2”) is not statistically better than the second best (“alc2”), and whereas “alc2” is convincingly better than the third best (“mspe”), and so on. At a high level, observe that the local methods without $\hat{\theta}(x)$ fare worst. NN is worse than the greedy methods across the board. Due to lack of statistical significance in differences between MSPE and ALC, the former might not be worth the added computational expense.

Focusing on the lengthscale parameter, the greedy methods calculating $\hat{\theta}(x)$ found ones around 7.5 whereas NN found ones around 5.5. The standard derivations were about 1.8 and 1.4 respectively. Clearly NN, while extremely fast to compute, is incurring some bias towards more wiggly/less smooth predictive surfaces by not choosing any local design locations far away from x . The $\hat{\theta}(x)$ values obtained for MSPE and ALC were very similar, although it is notable that second stage values had a slightly wider spread of $\hat{\theta}(x)$ s.

The double-sized experiment in the *right* table tells a similar story. Accuracy results increase slightly, but relative orders are similar. What is noteworthy is that the local methods require, as expected, about double the computational effort. By contrast the CSC methods take four to eight times longer, suggesting a quadratic scaling in N . Anecdotally we remark that the 99% sparse CSC method on $(N, n) = (8000, 1000)$ approaches the limit of the size of

problem possible on this machine due to memory constraints. We tried $N = 10000$. Frequent memory pages to disk lead to dramatic slowdowns; our estimates suggest the code would have taken days to finish. By contrast, the local/greedy methods required seconds more.

6 Discussion

This paper outlines a family of sequential design schemes to modernize an old idea of approximate kriging based on local neighborhoods. The result is a predictor that is fast, nonstationary, highly parallelizable, and whose “knobs” offer direct control on speed versus accuracy. Really the only tuning parameter is n , the size of the local design, which should be set as high as computational time/costs allow. By saving a small amount of information—indices of the local designs at each x , and corresponding $\hat{\theta}(x)$ values—designs can be augmented, picking up where they left off if more computational resources become available. Those resources do not need to be allocated uniformly. Larger local designs can be sought where, e.g., the predictive variance is larger. They need not apply the same greedy search method throughout. One could start with NN, continue with MSPE, and finish with ALC, which would be a sensible progression in light of earlier discussions.

Having a stopping criterion might be desirable for situations in which computational limits are less constrained. One option is to monitor the ratio of the predictive and reduced variances ($V_j(x)/V_{j+1}(x)$) over the iterations, and stop beyond a certain minimum threshold. Both depend on ψ_j , so cancellation would lead to a metric independent of the responses $\{y_i\}_{i=1}^j$ (other than via a common estimate of θ). However, non-uniform full-data designs coupled with spatially varying choices for θ make the actual *time* to convergence—which is related cubically to $n_{\text{thresh}}(x)$, the number of iterations required to reach a particular threshold—highly unpredictable. That lack of predictability is compounded over thousands of independent local design searches. Eschewing the known (and easily controlled/augmented) computational costs of a global n , in preference for thousands unknown $n_{\text{thresh}}(x)$, may not be ideal from a practical perspective.

One can introduce other degrees of freedom to obtain a faster, or higher-fidelity, approximation. For example, each greedy step searches over a potentially large set, $X - X_j(x)$, involving MSPE/ALC calculations at unlikely x_{j+1} very far x . Although such local designs do not coincide with NN ones, they still comprise primarily of nearby points. One could reduce the number of evaluations by searching in order of distance to x , stopping after some tolerance is reached on changes to ALC/MSPE. Even simpler is to consider a NN area of search candidates that is an order of magnitude larger than n , say n^m for m -dimensional input spaces. We used an simpler default for results in this paper, considering the nearest 1000 candidates. Results (except time) are unchanged with the nearest 10000.

We remark that there is a trade-off between the size of local designs and the non-stationary flexibility of the global predictor: as the designs get larger, the global surface can exhibit less spatial heterogeneity. The approximation will improve relative to the full-data GP, but it may exhibit poorer out-of-sample performance, suggesting it could be beneficial to stop early. Post-process pruning steps, perhaps via an out-of-sample validation scheme, could

be deployed to find $n^*(x) \leq n$. Another option is to augment the GP with elaborate mean structure, following (Kaufman et al., 2012). That would allow a sparser covariance structure, which for us is a sparser local design. That mean structure is one of the big strengths of the CSC method, which we anticipate would fare better in extrapolation exercises, or when predicting in an area of the input space with very sparse design coverage.

When the design and predictive grids are dense, and when the same θ parameters are used globally, the pattern of local designs in the interior of the input space (away from the boundaries) are highly regular. Those patterns could be replicated over x , forgoing expensive MSPE/ALC calculations. However, regular designs are rare in practice, especially for computer experiments where space-filling designs are preferred. For dense grids, perhaps structured Gaussian process predictors are a better way forward (e.g. Gilboa et al., 2012).

Finally, we see great potential for parallelization aspects of our method. Symmetric-multi-processor (SMP) machines are commonplace in modern desktop computing. Numbers of cores are doubling every few years and our methods are well-positioned to take advantage. Graphical processing units (GPUs) are taking off for scientific computing, having thousands of stripped-down computing cores. Some authors have already jumped on that bandwagon in the context of computer experiments (e.g., Franey et al., 2012; Eidsvik et al., 2011). Although requiring nontrivial extra programming effort (by comparison with `OpenMP`, say), we have high hopes for our methods in this platform.

Acknowledgements

The authors would like to thank Jarad Niemi for thoughtful discussions.

A Partition inverse equations

$$\text{If } K(x) = \begin{bmatrix} K & k(x) \\ k^\top(x) & K(x, x) \end{bmatrix}, \quad \text{then } K^{-1}(x) = \begin{bmatrix} [K^{-1} + g(x)g^\top(x)m^{-1}(x)] & g(x) \\ g^\top(x) & m(x) \end{bmatrix},$$

where $g(x) = -m(x)K^{-1}k(x)$ and $m^{-1}(x) = K(x, x) - k^\top(x)K^{-1}k(x)$.

B Mean-squared predictive error

Here we derive the expressions behind the MSPE (6) development in Section 3. We allow any form of the correlation function where derivatives are analytic. Although our expressions in the main body of text assume a scalar parameter θ , the derivations here allow for a p -parameter family, where $p \geq 1$. Therefore our partial derivatives are expressed component-wise and vectorized as appropriate. In most cases, the single-parameter result is obtained straightforwardly by removing subscripts and collapsing products of identical second derivatives into squares and/or factors of two.

We begin with the batch log likelihood derivatives which lead to the Fisher information. Define $w_j = K_j^{-1}Y_j$, which is a component of the marginal (log) likelihood (1) for data D_j via ψ_j . Much of what follows repeatedly leverages that

$$\frac{\partial K_j^{-1}}{\partial \theta_k} = -K_j^{-1} \frac{\partial K_j}{\partial \theta_k} K_j^{-1}, \quad (14)$$

where $\frac{\partial K_j}{\partial \theta_k}$ is the matrix of partial derivatives corresponding to K_j calculated via $K_{\theta, \eta}(x, x')$ for all (x, x') pairs in D_j . Recursive application yields $\frac{\partial^2 K_j}{\partial \theta_k \partial \theta_l}$. Then, for $1 \leq k, l \leq p$, we have

$$\frac{\partial w_j}{\partial \theta_k} = -K_j^{-1} \frac{\partial K_j}{\partial \theta_k} w_j, \quad \text{and} \quad \frac{\partial^2 w_j}{\partial \theta_k \partial \theta_l} = -K_j^{-1} \left[\frac{\partial^2 K_j}{\partial \theta_k \partial \theta_l} w_j + \frac{\partial K_j}{\partial \theta_k} \frac{\partial w_j}{\partial \theta_l} + \frac{\partial K_j}{\partial \theta_l} \frac{\partial w_j}{\partial \theta_k} \right]. \quad (15)$$

Also useful is

$$\frac{\partial \log |K_j|}{\partial \theta_k} = \frac{1}{|K_j|} \frac{\partial |K_j|}{\partial \theta_k} = \frac{|K_j| \operatorname{tr} \left\{ K_j^{-1} \frac{\partial K_j}{\partial \theta_k} \right\}}{|K_j|} = \operatorname{tr} \left\{ K_j^{-1} \frac{\partial K_j}{\partial \theta_k} \right\}.$$

Note that the trace of a product of square matrices $M^{(1)}$ and $M^{(2)}$ may be efficiently computed as $\sum_{k,l} M_{lk}^{(1)} M_{kl}^{(2)}$.

Using the above results, the first and second derivatives of the log likelihood $\ell_j(\theta) \equiv \log p(Y_j|\theta, X_j)$ given in (1) are (for $1 \leq k, l \leq p$)

$$\begin{aligned} \frac{\ell_j(\theta)}{\partial \theta_k} &= -\frac{1}{2} \operatorname{tr} \left\{ K_j^{-1} \frac{\partial K_j}{\partial \theta_k} \right\} + \frac{j Y_j^\top K_j^{-1} \frac{\partial K_j}{\partial \theta_k} K_j^{-1} Y_j}{2\psi_j}, \\ \text{and} \quad \frac{\partial^2 \ell_j(\theta)}{\partial \theta_k \partial \theta_l} &= -\frac{1}{2} \operatorname{tr} \left\{ K_j^{-1} \left[\frac{\partial^2 K_j}{\partial \theta_k \partial \theta_l} - \frac{\partial K_j}{\partial \theta_l} K_j^{-1} \frac{\partial K_j}{\partial \theta_k} \right] \right\} \\ &\quad - \frac{j Y_j^\top K_j^{-1}}{2\psi_j} \left[2 \frac{\partial K_j}{\partial \theta_l} K_j^{-1} \frac{\partial K_j}{\partial \theta_k} - \frac{\partial^2 K_j}{\partial \theta_k \partial \theta_l} \right] K_j^{-1} Y_j \\ &\quad + \frac{j}{2\psi_j^2} \left(Y_j^\top K_j^{-1} \frac{\partial K_j}{\partial \theta_k} K_j^{-1} Y_j \right) \left(Y_j^\top K_j^{-1} \frac{\partial K_j}{\partial \theta_l} K_j^{-1} Y_j \right). \end{aligned}$$

The Fisher information $F_j(\theta)$ matrix is obtained by negating the (k, l) elements of the second derivative above.

Sequential updating of the Fisher information leverages a recursive expression of the log likelihood which follows trivially from a cascading conditional representation of the joint probability of the responses given the parameters $\ell_{j+1}(\theta) = \log p(Y_{j+1}|\theta) = \log p(Y_j|\theta) + \log p(y_{j+1}|Y_j, \theta) \equiv \ell_j(\theta) + \ell_j(y_{j+1}; \theta)$ where the final term represents the conditional log-likelihood for y_{j+1} given Y_j and θ . Taking (negative) second derivatives yields the following updating equations

$$\{F_{j+1}(\theta)\}_{kl} = -\frac{\partial^2 \ell_j(\theta)}{\partial \theta_k \partial \theta_l} - \frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial \theta_k \partial \theta_l} = \{F_j(\theta)\}_{kl} - \frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial \theta_k \partial \theta_l}$$

Deriving the final term, here, requires expressions for $y_{t+1}|Y_t, \theta$, i.e., the predictive equations, and their derivatives. First,

$$\begin{aligned}\ell_j(y_{t+1}; \theta) &= \text{const} - \frac{1}{2} \log V_j(x_{j+1}; \theta) - \left(\frac{j+1}{2} \right) \log \left[j - 2 + \frac{(y_{j+1} - \mu_j(x_{j+1}; \theta))^2}{V_j(x_{j+1}; \theta)} \right] \\ &\equiv \text{const} - \frac{1}{2} \log V_j - \left(\frac{j+1}{2} \right) \log \left[j - 2 + \frac{(y_{j+1} - \mu_j)^2}{V_j} \right],\end{aligned}$$

thereby defining some shorthand that will be useful going forward.

The derivatives of the log likelihood follow immediately from applications of the chain rule. For $1 \leq k, l \leq p$,

$$\begin{aligned}\frac{\partial \ell_j(y_{j+1}; \theta)}{\partial \theta_k} &= -\frac{1}{2V_j} \frac{\partial V_j}{\partial \theta_k} + \left(\frac{j+1}{2} \right) \left[j - 2 + \frac{(y_{j+1} - \mu_j)^2}{V_j} \right]^{-1} \\ &\quad \times \left[\frac{2(y_{j+1} - \mu_j)}{V_j} \frac{\partial \mu_j}{\partial \theta_k} + \frac{(y_{j+1} - \mu_j)^2}{V_j^2} \frac{\partial V_j}{\partial \theta_k} \right].\end{aligned}\tag{16}$$

$$\begin{aligned}\frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial \theta_k \partial \theta_l} &= -\frac{1}{2V_j} \frac{\partial^2 V_j}{\partial \theta_k \partial \theta_l} + \frac{1}{2V_j^2} \frac{\partial V_j}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} + \left(\frac{j+1}{2} \right) \left[j - 2 + \frac{(y_{j+1} - \mu_j)^2}{V_j} \right]^{-2} \\ &\quad \times \left[\frac{2(y_{j+1} - \mu_j)}{V_j} \frac{\partial \mu_j}{\partial \theta_k} + \frac{(y_{j+1} - \mu_j)^2}{V_j^2} \frac{\partial V_j}{\partial \theta_k} \right] \left[\frac{2(y_{j+1} - \mu_j)}{V_j} \frac{\partial \mu_j}{\partial \theta_l} + \frac{(y_{j+1} - \mu_j)^2}{V_j^2} \frac{\partial V_j}{\partial \theta_l} \right] \\ &\quad + \left(\frac{j+1}{2} \right) \left[j - 2 + \frac{(y_{j+1} - \mu_j)^2}{V_j} \right]^{-1} \left\{ -\frac{2}{V_j} \frac{\partial \mu_j}{\partial \theta_k} \frac{\partial \mu_j}{\partial \theta_l} - \frac{2(y_{j+1} - \mu_j)}{V_j^2} \left[\frac{\partial \mu_j}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} + \frac{\partial \mu_j}{\partial \theta_l} \frac{\partial V_j}{\partial \theta_k} \right] \right. \\ &\quad \left. + \frac{2(y_{j+1} - \mu_j)^2}{V_j} \frac{\partial^2 \mu_j}{\partial \theta_k \partial \theta_l} - \frac{2(y_{j+1} - \mu_j)^2}{V_j^3} \frac{\partial V_j}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} + \frac{(y_{j+1} - \mu_j)^2}{V_j^2} \frac{\partial^2 V_j}{\partial \theta_k \partial \theta_l} \right\}\end{aligned}\tag{17}$$

Eqs. (16–17) require the derivatives of the predictive equations. In turn, those require w_j and its derivatives (15), and a new quantity $z_j = K_j^{-1} k_j \equiv K_j^{-1} k_j(x_{j+1}; \theta)$ and its derivatives:

$$\frac{\partial z_j}{\partial \theta_k} = K_j^{-1} \left[\frac{\partial k_j}{\partial \theta_k} - \frac{\partial K_j}{\partial \theta_k} z_j \right],\tag{18}$$

$$\text{and } \frac{\partial^2 z_j}{\partial \theta_k \partial \theta_l} = K_j^{-1} \left[\frac{\partial^2 k_j}{\partial \theta_k \partial \theta_l} - \frac{\partial^2 K_j}{\partial \theta_k \partial \theta_l} z_j - \frac{\partial K_j}{\partial \theta_k} \frac{\partial z_j}{\partial \theta_l} - \frac{\partial K_j}{\partial \theta_l} \frac{\partial z_j}{\partial \theta_k} \right]\tag{19}$$

which follow from applications of (14). The derivatives of the mean are then revealed as

$$\frac{\partial \mu_j}{\partial \theta_k} = \frac{\partial z_j^\top}{\partial \theta_k} Y_j, \quad \text{and} \quad \frac{\partial^2 \mu_j}{\partial \theta_k \partial \theta_l} = \frac{\partial^2 z_j^\top}{\partial \theta_k \partial \theta_l} Y_j.\tag{20}$$

For the variances it helps write $V_j = \frac{1}{j-2} \times \psi_j \times v_j$ where $v_j \equiv v_j(x_{j+1}; \theta) = K_\eta(x_{j+1}, x_{j+1}) - k_j^\top(x_{j+1}) K_j^{-1} k_j(x_{j+1})$, and $\psi_j \equiv \psi_j(\theta)$. We assume that when the arguments to $K_{\theta, \eta}$ are identical, as in v_j , the correlation function is no longer a function of θ . Derivatives then follow

as

$$\begin{aligned}\frac{\partial V_j}{\partial \theta_k} &= \left(\frac{1}{j-2} \right) \left[\frac{\partial \psi_j}{\partial \theta_k} v_j + \psi_j \frac{\partial v_j}{\partial \theta_k} \right] \\ &= \left(\frac{1}{j-2} \right) \left[Y_j^\top \frac{\partial w_j}{\partial \theta_k} v_j - \psi_j \left(\frac{\partial k_j}{\partial \theta_k} z_j + k_j^\top \frac{\partial z_j}{\partial \theta_k} \right) \right], \quad \text{and}\end{aligned}\tag{21}$$

$$\begin{aligned}\frac{\partial^2 V_j}{\partial \theta_k \partial \theta_l} &= \left(\frac{1}{j-2} \right) \left\{ Y_j^\top \frac{\partial^2 w_j}{\partial \theta_k \partial \theta_l} v_j + Y_j^\top \frac{\partial w_j}{\partial \theta_k} \frac{\partial v_j}{\partial \theta_l} - \frac{\partial \psi_j}{\partial \theta_l} \left[\frac{\partial k_j}{\partial \theta_k} z_j + k_j^\top \frac{\partial z_j}{\partial \theta_k} \right] \right. \\ &\quad \left. - \psi_j \left[\frac{\partial^2 k_j^\top}{\partial \theta_k \partial \theta_l} z_j + \frac{\partial k_j^\top}{\partial \theta_k} \frac{\partial z_j}{\partial \theta_l} + \frac{\partial k_j^\top}{\partial \theta_l} \frac{\partial z_j}{\partial \theta_k} + k_j^\top \frac{\partial^2 z_j}{\partial \theta_k \partial \theta_l} \right] \right\} \\ &= \left(\frac{1}{j-2} \right) \left\{ Y_j^\top \frac{\partial^2 w_j}{\partial \theta_k \partial \theta_l} v_j - Y_j^\top \frac{\partial w_j}{\partial \theta_k} \left[\frac{\partial k_j^\top}{\partial \theta_l} z_j + k_j^\top \frac{\partial z_j}{\partial \theta_l} \right] \right. \\ &\quad \left. - Y_j^\top \frac{\partial w_j}{\partial \theta_l} \left[\frac{\partial k_j^\top}{\partial \theta_k} z_j + k_j^\top \frac{\partial z_j}{\partial \theta_k} \right] - \psi_j \left[\frac{\partial^2 k_j^\top}{\partial \theta_k \partial \theta_l} z_j + \frac{\partial k_j^\top}{\partial \theta_k} \frac{\partial z_j}{\partial \theta_l} + \frac{\partial k_j^\top}{\partial \theta_l} \frac{\partial z_j}{\partial \theta_k} + k_j^\top \frac{\partial^2 z_j}{\partial \theta_k \partial \theta_l} \right] \right\}.\end{aligned}\tag{22}$$

This completes the expressions required for updating the Fisher information matrix.

The MSPE calculation (6) requires that the conditional likelihood be replaced with the expectation

$$\mathcal{G}_{j+1}(\theta) = F_j(\theta) + \mathbb{E} \left\{ -\frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial \theta_k \partial \theta_l} \right\}$$

because we wish to select the next x_{j+1} in a manner that does not utilize the “future” observation y_{j+1} . Unfortunately, the Student- t predictive equations (4–5) preclude a tractable analytic expectation calculation. Therefore, we approximate by employing Gaussian surrogate equations with matched moments. I.e.,

$$\ell_j(y_{j+1}; \theta) = \log p(y_{j+1}|Y_j, \theta) \approx -\frac{1}{2} \log 2\pi - \frac{1}{2} \log V_j - \frac{(y_{j+1} - \mu_j)^2}{2V_j}.\tag{23}$$

The (exact) derivatives for the approximation (23) then follow, for $1 \leq k, l, \leq p$

$$\frac{\partial \ell_j(y_{j+1}; \theta)}{\partial \theta_k} \approx -\frac{1}{2V_j} \frac{\partial V_j}{\partial \theta_k} + \frac{(y_{j+1} - \mu_j)}{V_j} \frac{\partial \mu_j}{\partial \theta_k} + \frac{(y_{j+1} - \mu_j)^2}{2V_j^2} \frac{\partial V_j}{\partial \theta_k},\tag{24}$$

$$\begin{aligned}\text{and } \frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial \theta_k \partial \theta_l} &\approx -\frac{1}{2V_j} \frac{\partial^2 V_j}{\partial \theta_k \partial \theta_l} + \frac{1}{2V_j^2} \frac{\partial V_j}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} - \frac{1}{V_j} \frac{\partial \mu_j}{\partial \theta_k} \frac{\partial \mu_j}{\partial \theta_l} \\ &\quad + \frac{(y_{j+1} - \mu_j)}{V_j} \frac{\partial^2 \mu_j}{\partial \theta_k \partial \theta_l} - \frac{(y_{j+1} - \mu_j)}{V_j^2} \left[\frac{\partial \mu_j}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} + \frac{\partial V_j}{\partial \theta_k} \frac{\partial \mu_j}{\partial \theta_l} \right] \\ &\quad + \frac{(y_{j+1} - \mu_j)^2}{2V_j^2} \frac{\partial^2 V_j}{\partial \theta_k \partial \theta_l} - \frac{(y_{j+1} - \mu_j)^2}{V_j^3} \frac{\partial V_j}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l}.\end{aligned}\tag{25}$$

Taking the (negative) expectation of (25) gives,

$$\begin{aligned}
\mathbb{E} \left\{ -\frac{\partial^2 \ell_j(y_{j+1}; \theta)}{\partial \theta_k \partial \theta_l} \middle| Y_j, \theta \right\} &= \frac{1}{2V_j} \frac{\partial^2 V_j}{\partial \theta_k \partial \theta_l} - \frac{1}{2V_j^2} \frac{\partial V_j}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} + \frac{1}{V_j} \frac{\partial \mu_j}{\partial \theta_l} \frac{\partial \mu_j}{\partial \theta_k} \\
&\quad - \frac{1}{2V_j} \frac{\partial^2 V_j}{\partial \theta_k \partial \theta_l} + \frac{1}{V_j^2} \frac{\partial V_k}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} \\
&= \frac{1}{2V_j^2} \frac{\partial V_k}{\partial \theta_k} \frac{\partial V_j}{\partial \theta_l} + \frac{1}{V_j} \frac{\partial \mu_j}{\partial \theta_k} \frac{\partial \mu_j}{\partial \theta_l}
\end{aligned} \tag{26}$$

Now, given a specified input site x at which predictions of $Y(x)$ are desired, and given data D_j containing previously selected sites, the objective is to choose the next site x_{j+1} recognizing that the data pairs will lead to improved predictions via (4–5) *and* an improved estimate of the correlation parameters θ . If the latter were of primary concern, one possible way to choose x_{j+1} would be to maximize the determinant of $\mathcal{G}_{j+1}(\theta)$ for some choice of θ . While reasonable, this does not directly consider the prediction error variance of $Y(x)$. Therefore it possess no mechanism for giving a local character to the estimate of θ . So instead we propose to choose x_{j+1} to minimize the predictive variance of $Y(x)$ in a manner that considers the impact of estimation uncertainty in θ . Specifically, we choose x_{j+1} to minimize the Bayesian mean squared prediction error defined as

$$J(x_{j+1}) = \mathbb{E} \left\{ \left[Y(x) - \mu_{j+1}(x; \hat{\theta}_{j+1}) \right]^2 \middle| Y_j \right\}, \tag{27}$$

where $\mu_{j+1}(x; \hat{\theta}_{j+1})$ depends on (x_{j+1}, y_{j+1}) and represents the hypothetical prediction of $Y(x)$ that would result after choosing x_{j+1} , observing y_{j+1} , calculating MLE $\hat{\theta}_{j+1}$ based on the expanded data set D_{j+1} , and using the MLE in the prediction of $Y(x)$. Eq. (27) becomes

$$\begin{aligned}
J(x_{j+1}) &= \mathbb{E} \left\{ \left[Y(x) - \mu_{j+1}(x; \theta) + \mu_{j+1}(x; \theta) - \mu_{j+1}(x; \hat{\theta}_{j+1}) \right]^2 \middle| Y_j \right\} \\
&= \mathbb{E} \left\{ \mathbb{E} \left\{ \left[Y(x) - \mu_{j+1}(x; \theta) + \mu_{j+1}(x; \theta) - \mu_{j+1}(x; \hat{\theta}_{j+1}) \right]^2 \middle| Y_j, y_{j+1}, \theta \right\} \middle| Y_j \right\} \\
&= \mathbb{E} \left\{ \mathbb{E} \left\{ [Y(x) - \mu_{j+1}(x; \theta)]^2 \middle| Y_j, y_{j+1}, \theta \right\} \middle| Y_j \right\} \\
&\quad + \mathbb{E} \left\{ \mathbb{E} \left\{ [Y(x) - \mu_{j+1}(x; \theta)] [\mu_{j+1}(x; \theta) - \mu_{j+1}(x; \hat{\theta}_{j+1})] \middle| Y_j, y_{j+1}, \theta \right\} \middle| Y_j \right\} \\
&\quad + \mathbb{E} \left\{ \mathbb{E} \left\{ [\mu_{j+1}(x; \theta) - \mu_{j+1}(x; \hat{\theta}_{j+1})]^2 \middle| Y_j, y_{j+1}, \theta \right\} \middle| Y_j \right\} \\
&= \mathbb{E} \left\{ V_{j+1}(x; \theta) \middle| Y_j \right\} + 0 + \mathbb{E} \left\{ [\mu_{j+1}(x; \theta) - \mu_{j+1}(x; \hat{\theta}_{j+1})]^2 \middle| Y_j \right\}.
\end{aligned} \tag{28}$$

Regarding the first term in (28), we approximate it as

$$\mathbb{E} \left\{ V_{j+1}(x; \theta) \middle| Y_j \right\} = \mathbb{E} \left\{ \frac{\psi_{j+1}(\theta)}{(j-1)} v_{j+1}(x; \theta) \middle| Y_j \right\} \approx \frac{(j+1)\psi_j}{j(j-1)} v_{j+1}(x; \hat{\theta}_j) \tag{29}$$

which can be recognized as the new/reduced variance (10) implied after adding x_{j+1} into D_j but which does not condition on y_{j+1} and, therefore, uses the MLE calculated from D_j . Regarding the last term in (28), we again approximate as follows.

$$\begin{aligned}\mu_{j+1}(x; \theta) - \mu_{j+1}(x; \hat{\theta}_{j+1}) &\approx \left[\frac{\partial \mu_{j+1}(x; \theta)}{\partial \theta} \Big|_{\theta=\hat{\theta}_{j+1}} \right]^\top (\theta - \hat{\theta}_{j+1}) \\ &\approx \left[\frac{\partial \mu_j(x; \theta)}{\partial \theta} \Big|_{\theta=\hat{\theta}_j} \right]^\top (\theta - \hat{\theta}_{j+1})\end{aligned}\quad (30)$$

The last inequality in (30) involves two approximations. First, the partial derivative of $\mu_{j+1}(x; \theta)$ at future $\hat{\theta}_{j+1}$ is approximated by the partial derivative at the current $\hat{\theta}_j$. The second approximation uses the partial derivative of $\mu_j(x; \theta)$ instead. Both are required for tractability because $\hat{\theta}_{j+1}$ and $\mu_{j+1}(x; \theta)$ depend on the future y_{j+1} in a manner that would make the expectation in (30) difficult to evaluate analytically.

Note that the difference between $\mu_{j+1}(x; \theta)$ and $\mu_j(x; \theta)$, and their partial derivatives at a common value of θ , will generally be similar for larger j because the most influential points are included in initial iterations. For situations in which y_{t+1} is available in advance, one might consider using it for calculating the partial derivative of $\mu_{j+1}(x; \theta)$, and thereby avoid an approximated expectation. However, even though this would lend tractability and accuracy in one sense, it may not be as attractive a criterion as using $\mu_j(x; \theta)$. A strategy that used the partial derivative of $\mu_{j+1}(x; \theta)$ might avoid adding a site at which y_{j+1} was not consistent with the other $\{y_i, i = 1, 2, \dots, j\}$, which would ignore unusual or unpredictable features of the response surface.

Substituting (29) and (30) into (28), and assuming the posterior covariance matrix of θ about its MLE can be approximated by the inverse of the Fisher information matrix $\mathcal{G}_{j+1}(\hat{\theta}_j)$ given in (6), leaves us with

$$\begin{aligned}J(x_{j+1}) &= \frac{(j+1)\psi_j}{j(j-1)} v_{j+1}(x; \hat{\theta}_j) \\ &\quad + \mathbb{E} \left\{ \left[\frac{\partial \mu_j(x; \theta)}{\partial \theta} \Big|_{\theta=\hat{\theta}_j} \right]^\top (\theta - \hat{\theta}_{j+1})(\theta - \hat{\theta}_{j+1})^\top \left[\frac{\partial \mu_j(x; \theta)}{\partial \theta} \Big|_{\theta=\hat{\theta}_j} \right] \Big| Y_j \right\} \\ &\approx \frac{(j+1)\psi_j}{j(j-1)} v_{j+1}(x; \hat{\theta}_j) + \left[\frac{\partial \mu_j(x; \theta)}{\partial \theta} \Big|_{\theta=\hat{\theta}_j} \right]^\top \mathcal{G}_{j+1}^{-1}(\hat{\theta}_j) \left[\frac{\partial \mu_j(x; \theta)}{\partial \theta} \Big|_{\theta=\hat{\theta}_j} \right].\end{aligned}$$

C An interpretation of the reduction in variance criterion in terms of partial correlations

The ALC criterion (10) has a helpful interpretation in terms of the partial correlation between the prediction errors at x and at some x' , a potential new site to be added into the design. For the case when all parameters are known, denote the error in predicting $Y(x)$, given

data D_j , by $e(x|Y_j) = Y(x) - \mu_j(x; \theta)$. Note that $e(x|Y_j)$ and Y_j are orthogonal under the standard correlation inner product, and consider the orthogonal decomposition

$$Y(x) = \mu_j(x; \theta) + e(x|Y_j) = \mu_j(x; \theta) + \rho \frac{\sqrt{\text{Var}[e(x|Y_j)]}}{\sqrt{\text{Var}[e(x'|Y_j)]}} e(x'|Y_j) + e(x|Y_j, x') \quad (31)$$

where

$$\rho = \text{Corr}[e(x|Y_j), e(x'|Y_j)] = \frac{\text{Cov}[e(x|Y_j), e(x'|Y_j)]}{\sqrt{\text{Var}[e(x|Y_j)]} \sqrt{\text{Var}[e(x'|Y_j)]}}$$

denotes the correlation coefficient between the errors in predicting $Y(x)$ and $Y(x')$. Sometimes this is called the *partial correlation coefficient* between $Y(x)$ and $Y(x')$ given Y_j .

Because of the orthogonality of the three terms in (31), the error variance in predicting $Y(x)$ given Y_j is

$$\text{Var}[e(x|Y_j)] = \rho^2 \text{Var}[e(x|Y_j)] + \text{Var}[e(x|Y_j, x')]. \quad (32)$$

The right-most term in (32) is defined as the error variance in predicting $Y(x)$ after including the response at x' . Hence, the term

$$\rho^2 \text{Var}[e(x|Y_j)] = \text{Corr}^2[e(x|Y_j), e(x'|Y_j)] \text{Var}[e(x|Y_j)] = \frac{\text{Cov}^2[e(x|Y_j), e(x'|Y_j)]}{\text{Var}[e(x'|Y_j)]} \quad (33)$$

is the reduction in predictive variance in $Y(x)$ after including the response at x' .

Noting that

$$\text{Cov}[e(x|Y_j), e(x'|Y_j)] = \tau^2 [K(x, x') - k_j^\top(x) K_j^{-1} k_j(x')],$$

it is straightforward to show that (33) is equivalent to the criterion in (10) with $\psi_j/(j-2)$, an estimate of τ^2 , replaced by τ^2 . Because $\text{Var}[e(x|Y_j)]$ does not depend on x' , the expression (33) for the reduction in variance implies that the next site x_{j+1} should be chosen to maximize the correlation between the errors in predicting $Y(x)$ and $Y(x_{j+1})$ given Y_j .

References

- Anagnostopoulos, C. and Gramacy, R. B. (2012). “Dynamic trees for streaming and massive data contexts.” Tech. Rep. 1201.5568, arXiv.
- Barnett, S. (1979). *Matrix Methods for Engineers and Scientists*. McGraw-Hill.
- Berger, J., De Oliveira, V., and Sanso, B. (2001). “Objective Bayesian Analysis of Spatially Correlated Data.” *Journal of the American Statistical Association*, 96, 1361–1374.
- Cohn, D. A. (1996). “Neural Network Exploration using Optimal Experimental Design.” In *Advances in Neural Information Processing Systems*, vol. 6(9), 679–686. Morgan Kaufmann Publishers.

- Cressie, N. (1991). *Statistics for Spatial Data*, revised edition. John Wiley and Sons, Inc.
- Cressie, N. and Johannesson, G. (2008). “Fixed Rank Kriging for Very Large Data Sets.” *Journal of the Royal Statistical Society, Series B*, 70, 1, 209–226.
- Eidsvik, J., Shaby, B., Reich, B., Wheeler, M., and Niemi, J. (2011). “Estimation and prediction in spatial models with block composite likelihoods using parallel computing.” Statistics 7/2011, Norwegian University of Science and Technology, N-7491 Trondheim, Norway. *To appear in JCGS*.
- Franey, M., Ranjan, P., and Chipman, H. (2012). “A Short Note on Gaussian Process Modeling for Large Datasets using Graphics Processing Units.” Tech. rep., Acadia University.
- Furrer, R., Genton, M., and Nychka, D. (2006). “Covariance tapering for interpolation of large spatial datasets.” *Journal of Computational and Graphical Statistics*, 15, 502–523.
- Gilboa, E., Saatçi, Y., and Cunningham, J. P. (2012). “Scaling Multidimensional Inference for Structured Gaussian Processes.” *ArXiv e-prints*.
- Gramacy, R. and Lee, H. (2011a). “Cases for the nugget in modeling computer experiments.” *Statistics and Computing*, 22, 3.
- (2011b). “Optimization under unknown constraints.” In *Bayesian Statistics 9*, eds. J. Bernardo, S. Bayarri, J. Berger, A. Dawid, D. Heckerman, A. Smith, and M. West, 229–256. Oxford University Press.
- Gramacy, R. and Polson, N. (2011). “Particle Learning of Gaussian Process Models for Sequential Design and Optimization.” *Journal of Computational and Graphical Statistics*, 20, 1, 102–118.
- Gramacy, R. B. and Lee, H. K. H. (2009). “Adaptive Design and Analysis of Supercomputer Experiments.” *Technometrics*, 51, 2, 130–145.
- Haaland, B. and Qian, P. (2011). “Accurate Emulators for Large-Scale Computer Experiments.” *Annals of Statistics*, 39, 6, 2974–3002.
- Kaufman, C., Bingham, D., Habib, S., Heitmann, K., , and Frieman, J. (2012). “Efficient Emulators of Computer Experiments Using Compactly Supported Correlation Functions, With An Application to Cosmology.” *Annals of Applied Statistics*. *To appear*.
- McKay, M., Conover, W., and Beckman, R. (1979). “A comparison of three methods for selecting values of input variables in the analysis of output from a computer code.” *Technometrics*, 21, 2, 239–245.
- Morris, D., Mitchell, T., and Ylvisaker, D. (1993). “Bayesian Design and Analysis of Computer Experiments: Use of Derivatives in Surface Prediction.” *Technometrics*, 35, 243–255.

- Nychka, D., Wikle, C., and Royle, J. (2002). “Multiresolution Models for Nonstationary Spatial Covariance Functions.” *Statistical Modelling*, 2, 315–331.
- Paciorek, C. J. and Schervish, M. J. (2006). “Spatial Modelling Using a New Class of Nonstationary Covariance Functions.” *Environmetrics*, 17, 5, 483–506.
- Peng, C. and Wu, C. (2012). “Regularized Kriging.” Tech. rep., Georgia Institute of Technology.
- Quiñonero-Candela, J. and Rasmussen, C. (2005). “A Unifying View of Sparse Approximate Gaussian Process Regression.” *Journal of Machine Learning Research*, 6, 1939–1959.
- Ranjan, P., Haynes, R., and Karsten, R. (2011). “A Computationally Stable Approach to Gaussian Process Interpolation of Deterministic Computer Simulation Data.” *Technometrics*, 53, 4, 363–378.
- Rasmussen, C. E. and Williams, C. K. I. (2006). *Gaussian Processes for Machine Learning*. The MIT Press.
- Sang, H. and Huang, J. Z. (2012). “A Full Scale Approximation of Covariance Functions for Large Spatial Data Sets.” *Journal of the Royal Statistical Society: Series B*, 74, 1, 111–132.
- Santner, T. J., Williams, B. J., and Notz, W. I. (2003). *The Design and Analysis of Computer Experiments*. New York, NY: Springer-Verlag.
- Schmidt, A. M. and O’Hagan, A. (2003). “Bayesian Inference for Nonstationary Spatial Covariance Structure via Spatial Deformations.” *Journal of the Royal Statistical Society, Series B*, 65, 745–758.
- Seo, S., Wallat, M., Graepel, T., and Obermayer, K. (2000). “Gaussian Process Regression: Active Data Selection and Test Point Rejection.” In *Proceedings of the International Joint Conference on Neural Networks*, vol. III, 241–246. IEEE.
- Snelson, E. and Ghahramani, Z. (2006). “Sparse Gaussian Processes using Pseudo-inputs.” In *Advances in Neural Information Processing Systems*, 1257–1264. MIT press.
- Stein, M. L. (1999). *Interpolation of Spatial Data*. New York, NY: Springer.
- Stein, M. L., Chi, Z., and Welty, L. J. (2004). “Approximating Likelihoods for Large Spatial Data Sets.” *Journal of the Royal Statistical Society, Series B*, 66, 2, 275–296.
- Vecchia, A. (1988). “Estimation and model identification for continuous spatial processes.” *Journal of the Royal Statistical Society, Series B*, 50, 297–312.
- Worley, B. (1987). “Deterministic Uncertainty Analysis.” Tech. Rep. ORN-0628, National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161, USA.